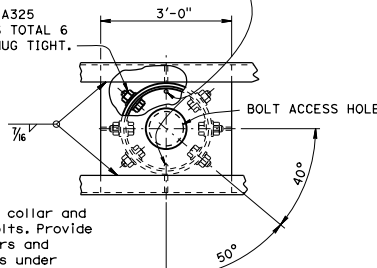
**NOTES:**

1. Crossties at vertical and diagonal angles and internal diagonals not shown for clarity.
2. Interior grating, backside safety cable and backside weld lugs shall be installed only for projects requiring backside walkways.

**PLAN**

GALVANIZING DRAIN HOLE. DRILL AND TAP THRU CAP PLATE FOR 1" Dia A307 BOLT,  $\frac{5}{16}$ " CLEAR OF INSIDE COLLAR WALL. INSTALL BOLT AFTER GALVANIZING

$1\frac{1}{2}$ " Dia A325 HS BOLTS TOTAL 6 TO BE SNUG TIGHT.

**DETAIL A****NOTES:**

Drill thru outer collar and post wall for bolts. Provide contoured washers and hardened washers under bolt head and nut. Contoured washers to be 3" x 3" x  $\frac{5}{16}$ " minimum. Grind face to fit.

7" Dia BOLT CIRCLE

DRILL AND TAP THRU CAP PLATE FOR  $\frac{1}{4}$ " Dia ROUND HEAD BRASS MACHINE SCREW 1" LONG, 4 HOLES EQUALLY SPACED

8" Dia x  $\frac{1}{4}$ " COVER PLATE

**PLAN**  
**BOLT-ACCESS HOLE**  
Single Post Type

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
<p>October 30, 2015 PLANS APPROVAL DATE</p> <p>REGISTERED CIVIL ENGINEER</p> <p>Jeffrey B. Woody No. C41260 Exp. 3-31-17 CIVIL STATE OF CALIFORNIA</p> <p>THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.</p>					

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**OVERHEAD SIGN-TRUSS  
SINGLE POST TYPE  
PLAN AND UPPER BOLT DETAILS  
UNBALANCED BUTTERFLY  
CHANGEABLE MESSAGE SIGNS  
MODEL 500**

NO SCALE

**S103**